


Self-Closing Sleeve



NU-GUARD SC2-P

NU-GUARD SC2-P is an optimized version of the NU-GUARD SC-P self-closing sleeve.

The flat-knit construction is made of PET monofilament and textured multifilament combination which gives NU-GUARD SC2-P a rugged but yet smooth texture and appearance. It is then shaped cylindrical with a 90° minimum overlap.

The self-closure construction of NU-GUARD SC2-P is ideal for reworking components without disconnecting them and ensures a protection of the wires.

- Extremely lightweight
- Abrasion resistance
- Smooth appearance
- Easy to apply


Application

NU-GUARD SC2-P is particularly suited to protect and bundle wire harnesses, cable assemblies and hoses from cutting, abrasion and chafing. NU-GUARD SC2-P is self-closing and can be wrapped directly and easily on the wires.

Installation specifications are available at Delfingen Quality Department.


Characteristics

Colors: black only. This sleeve is identified by a purple stripe on the edge.

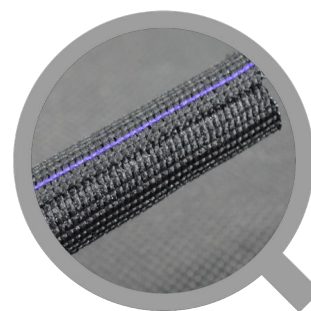

Physical properties	Specification	Unit	Value
Continuous temperature of use (3000h)	-	°C (°F)	-40/150 (-40/302)
Peak temperature (240h)	-	°C (°F)	175 (347)
Melting point	ISO 11357-3	°C (°F)	260 (500)
Abrasion resistance	ISO 6722 SAE ARP 1536 A LV 312 RSA 36 05 035 B	cycles	5075 123511 1450 MG4 (B)
Flammability	FMVSS 302 SAE J 369	mm/min -	<100 self-extinguishing
Chemical resistance	SAE J 2192 D47 1924	Resists the majority of chemicals and automotive fluids (oils, coolant, battery liquid, brake fluid, fuels, windshield washer...)	

Dimensions

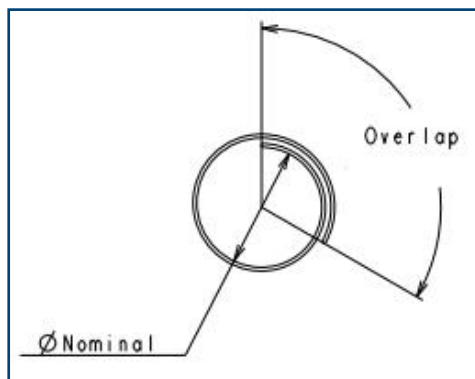

Designation	Nominal Ø (mm)	Functional Ø (mm)
NU-GUARD SC2-P 05	5	1 - 5
NU-GUARD SC2-P 08	8	6 - 8
NU-GUARD SC2-P 10	10	9 - 10
NU-GUARD SC2-P 13	13	11 - 13
NU-GUARD SC2-P 16	16	14 - 16
NU-GUARD SC2-P 19	19	17 - 19
NU-GUARD SC2-P 25	25	20 - 25
NU-GUARD SC2-P 29	29	26 - 29
NU-GUARD SC2-P 32	32	30 - 32
NU-GUARD SC2-P 38	38	33 - 38
NU-GUARD SC2-P 42	42	39 - 42

Approvals

- Direct: BMW, Fiat Chrysler Automobiles, Ford, General Motors, Jaguar/Land Rover, Peugeot-Citroën, Renault-Nissan, Tata Motors, Volvo Cars Corp.
- Via Tier-1: Brilliance Auto, Dongfeng Motor

Packaging

NU-GUARD SC2-P is delivered in coils or in cut lengths upon request.

Data and photos for information only. Delfingen makes no warranties as to the accuracy or completeness of this information. Delfingen reserves the right to make changes in materials or processing without notification.

Corporate Headquarters: DELFINGEN Industry S.A., Rue Emile Streit, 25340 Anteuil, France

Tel: +33 (0)3 81 90 73 00 • delfingen@delfingen.com

www.delfingen.com